

Trelleborg



TM600

Reliability at first sight



The TM600 range is the ideal solution for mid-range tractors, delivering an impressive combination of strength and efficiency.



**PREMIUM
TRACTION**



**SUPERIOR
FLOTATION**



**EXCELLENT
COMFORT**

High traction capacity for maximum crop protection

The shape, geometry, number and depth of TM600's lugs have been carefully designed to guarantee high traction capability in all soil conditions.

The chart below shows the high pull force of Trelleborg TM600 tires compared to the same sizes of premium brand competitors.

Traction in field - Index

Higher is better



Reference sizes: 520/85R38 - 420/85R28

Slippage: 10-15%


Load rear tire: 3.200 kg

Inflation pressure: 1,2 bar

Soil moisture: 12%

Time to plough 300 ha

Lower is better

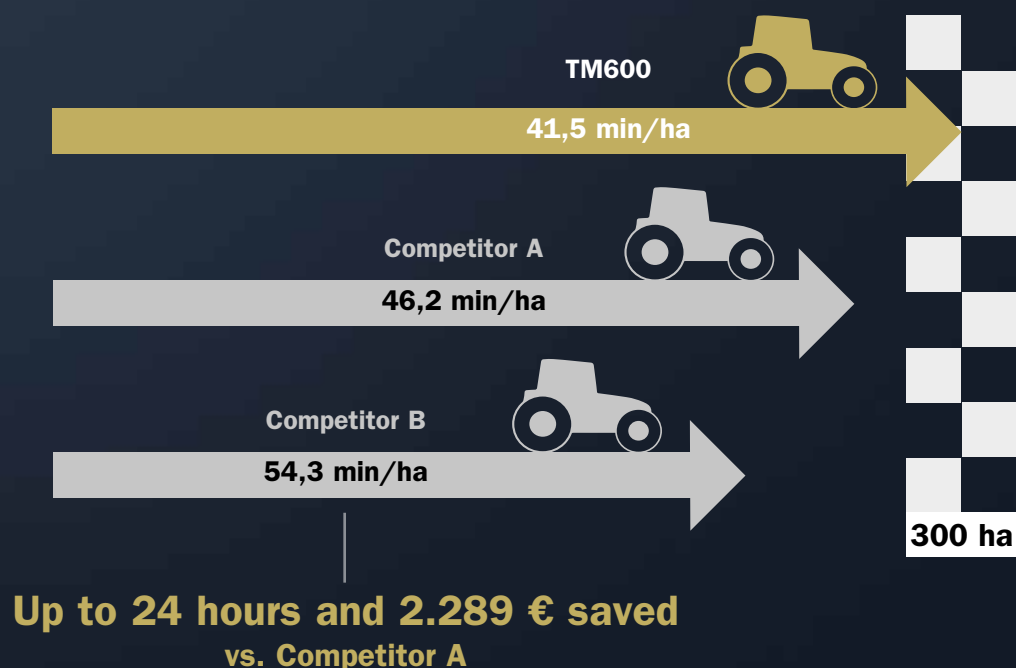

Enhancing soil protection

- 1 The rounded shoulder of the lug has been designed to minimise damage to grass and crops as well as maintaining good lateral stability and traction.



- 2 The geometry of the inter-lug terraces enhances the tire's self-cleaning performance on muddy soil.




Minimum soil compaction, maximum lightness

The TM600 guarantees consistent soil penetration and high flotation performance, effectively minimizing compaction and safeguarding soil health while improving fertility. In order to achieve these benefits, the lug surface area has been designed to minimize the contact pressure value in the centre of the tread.

Footprint comparison

Higher is better


+13%
wider footprint
vs. Competitor A

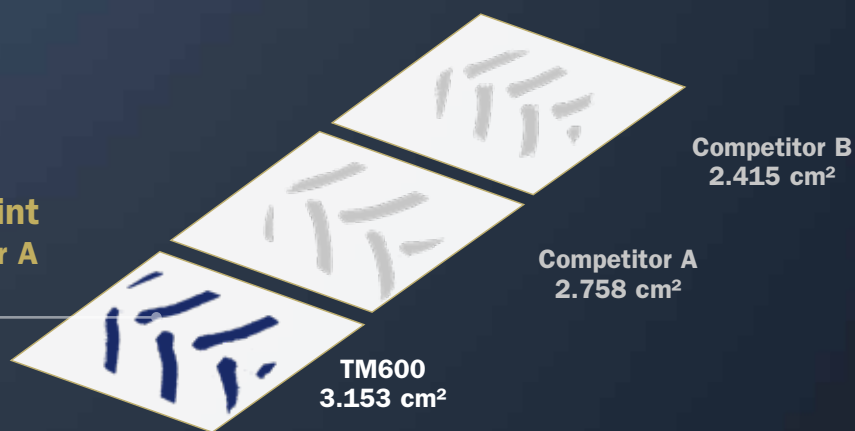

Size: 520/85R38
Load: 3.875 kg

Soil compaction - Index

Lower is better

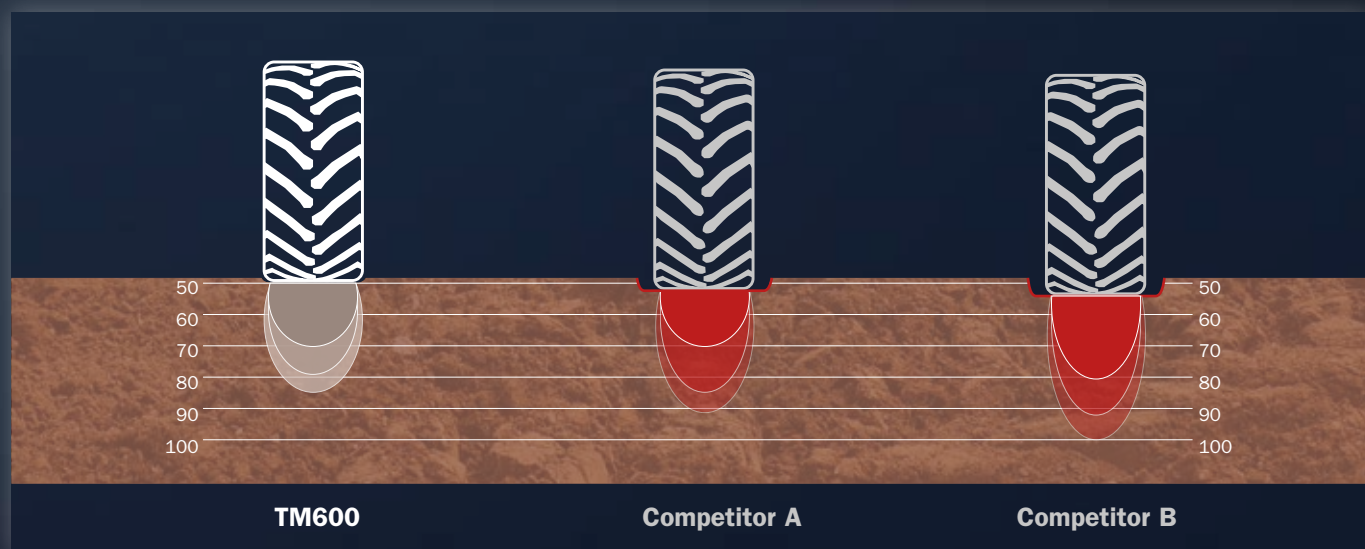

-8%
vs. Competitor A

Size: 520/85R38

Exceptional comfort

Over the years, the TM600 has not only delivered great performance in the fields, but also on the road, ensuring high comfort throughout the complete lifetime of the tire.

In addition to exceptional comfort, the TM600 has great handling performance in terms of steering and cornering stability.

This results in a very good driver experience, and delivers a better handling when compared to premium brand competitors.

Comfort performance - Index

Higher is better

100



TM600

80



Competitor A

60



Competitor B

+20%
vs. Competitor A

Reference sizes: 380/85R28 - 460/85R38

Handling performance - Index

Higher is better

100



TM600

75



Competitor A

50



Competitor B

+25%
vs. Competitor A

Rear size: 460/85R38

TM600

Size	Tread Pattern	SW mm	OD mm	SLR mm	RC mm	SRI	Rim	Permitted Rims	Type	Tube
210/95R16 106A8 (106B)	TM600	210	800	363	2415	390	W7	W6 - 5.50F	TUBELESS	
210/95R18 108A8 (108B)	TM600	210	855	391	2555	410	W7	W6 - 5.50F	TUBELESS	
280/85R20 112A8 (109B) (11.2R20)	TM600	295	985	450	2955	475	W10	W9 - W8 - DW10	TUBELESS	11.2-20 TR218
320/85R20 119A8 (116B) (12.4R20)	TM600	329	1052	470	3160	500	W11	W10 - W9 - DW11	TUBELESS	11.2-20 TR218
250/85R24 112A8 (109B)	TM600	245	1035	465	3115	500	W8	W7 - W9	TUBELESS	9.5R24 TR218
280/85R24 115A8 (112B) (11.2R24)	TM600	292	1086	494	3276	525	W10	W9 - W8 - DW10	TUBELESS	11.2-24 TR218
320/85R24 122A8 (119B) (12.4R24)	TM600	329	1154	515	3465	550	W11	W10 - W9 - DW10 DW11	TUBELESS	12.4/13.6-24 TR218
340/85R24 125A8 (122B) (13.6R24)	TM600 TM600 HD	353	1188	540	3547	575	W12	W11 - DW11 - DW12	TUBELESS	13.6/14.9-24 TR218
380/85R24 131A8 (128B) (14.9R24)	TM600	390	1256	560	3750	600	W13	W12 - W11 - DW11 DW12 - DW13	TUBELESS	14.9/16.9-24 TR218
420/85R24 137A8 (134B) (16.9R24)	TM600	438	1324	590	3970	625	W15L	W14L - DW14L DW15L	TUBELESS	16.9-24 TR218
280/85R28 118A8 (115B) (11.2R28)	TM600	292	1187	542	3580	575	W10	W9 - DW10	TUBELESS	11.2/12.4-28 TR218
320/85R28 124A8 (121B) (12.4R28)	TM600	329	1255	566	3796	600	W11	W10 - W9 - DW10 DW11	TUBELESS	12.4-28 TR218
340/85R28 127A8 (124B) (13.6R28)	TM600 TM600 HD	353	1289	595	3885	625	W12	W11 - DW11 - DW12	TUBELESS	13.6/12.4-28 TR218
380/85R28 133A8 (130B) (14.9R28)	TM600	390	1357	615	4085	650	W13	W12 - W11 - DW11 DW12 - DW13	TUBELESS	14.9/16.9-28 TR218
420/85R28 139A8 (136B) (16.9R28)	TM600 TM600 HD	438	1425	635	4290	675	W15L	W14L - DW14L DW15L	TUBELESS	16.9-28 TR218
380/85R30 135A8 (135B) (14.9R30)	TM600 ProgressiveTraction®	390	1408	635	4238	675	W13	W12 - W11 - DW11 DW12 - DW13	TUBELESS	14.9-30 TR218
380/85R30 135A8 (135B) (14.9R30)	TM600	390	1408	635	4238	675	W13	W12 - W11 - DW11 DW12 - DW13	TUBELESS	14.9-30 TR218
420/85R30 140A8 (137B) (16.9R30)	TM600 TM600 HD	438	1475	660	4455	700	W15L	W14L - DW14L - DW15L	TUBELESS	16.9/18.4-30 TR218
420/90R30 147A8 (147B)	TM600	435	1518	691	4580	700	DW13	W13 - W14L - DW14L	TUBELESS	18.4-30 TR218
460/85R30 145A8 (142B) (18.4R30)	TM600	475	1544	691	4678	725	W16L	W15L - DW15L DW16L	TUBELESS	18.4-30 TR218
380/85R34 137A8 (137B) (14.9R34)	TM600	390	1513	683	4574	725	W12	W13	TUBELESS	16.9-34 TR218
380/85R34 142A8 (142B) (14.9R.3A)	TM600	390	1515		4565	725	W12	W13	TUBELESS	
420/85R34 142A8 (139B) (16.9R34)	TM600	438	1578	715	4745	750	W15L	W14L - DW14L DW15L	TUBELESS	16.9-34 TR218
420/85R34 147A8 (147B)	TM600	445	1575	725	4735	750	W15L	W14L - DW14L DW15L	TUBELESS	16.9-34 TR218
460/85R34 147A8 (144B)	TM600 TM600 HD	475	1646	745	4945	775	W16L	W15L - DW15L - DW16L	TUBELESS	16.9/18.4-34 TR218
320/85R38 129A8 (126B) (12.4R38)	TM600	325	1520	690	4605	725	W11	W10 - W9 - DW10 DW11	TUBELESS	12.4/16.9-38 TR218
340/85R38 133A8 (130B) (13.6R38)	TM600	353	1543	710	4665	750	W12	W11 - DW11 DW12	TUBELESS	13.6/16.9-38 TR218
380/80R38 142A8 (142B)	TM600	375	1575	724	4765	750	W12	W11 - W13 DW11 - DW12 - DW13	TUBELESS	14.9/16.9-38 TR218
380/85R38 144A8 (144B) (14.9R38)	TM600	400	1610	730	4900	775	W13	W11 - W12 DW11 - DW12 - DW13	TUBELESS	16.9-38 TR218
380/95R38 147A8 (147B)	TM600 ProgressiveTraction®	390	1674	762	5020	800	W12	W13	TUBELESS	
400/75R38 138A8 (135B) (15.5R38)	TM600	395	1565	707	4670	750	DW14L	W14L	TUBELESS	
420/85R38 144A8 (141B) (16.9R38)	TM600	438	1679	760	5060	800	W15L	W14L - DW14L DW15L	TUBELESS	16.9-38 TR218
420/85R38 149A8 (149B)	TM600 ProgressiveTraction®	440	1665	766	5000	800	W14L	DW14L - W15L DW15L	TUBELESS	
460/85R38 149A8 (146B) (18.4R38)	TM600 TM600 HD	475	1747	800	5260	825	W16L	W15L - DW15L DW16L	TUBELESS	18.4-38 TR218
480/80R38 149A8 (149B)	TM600 ProgressiveTraction®	495	1760	786	5325	825	W16A	W15 - DW15 - DW16	TUBELESS	
520/85R38 155A8 (152B) (20.8R38)	TM600 TM600 HD	536	1849	825	5510	875	DW18L	W16L - W18L DW16L	TUBELESS	20.8-38 TR218
520/85R38 155A8 (152B) (20.8R38)	TM600 ProgressiveTraction®	562	1849	820	5550	875	DW18L	W16L - W18L - DW16L	TUBELESS	20.8-38 TR218
480/80R42 151A8 (151B) (18.4R42)	TM600 TM600 HD	495	1850	833	5550	875	W16A	DD16 - DW16B - DW16L	TUBELESS	18.4/20.8-42 TR218
520/85R42 157A8 (157B) (20.8R42)	TM600 TM600 HD	536	1952	881	5867	925	DW18L	W16L - W18L DW16L	TUBELESS	20.8-42 TR218
480/80R46 158A8 (158B) (18.4R46)	TM600	495	1964	887	5950	925	W16A	DD16 - DW16B	TUBELESS	
520/85R46 158A8 (158B) (20.8R46)	TM600	535	2045	905	6160	975	DW16L	W16L - W18L - DW16L DD16L - DD18L	TUBELESS	
480/80R50 159D	TM600	500	2045	935	6190	975	DW15B	DW16B	TUBELESS	
480/80R50 159A8 (159B)	TM600 Rice ProgressiveTraction®	490	2045		6185	975	DW15B		TUBELESS	
480/95R50 164A8 (164B)	TM600 ProgressiveTraction®	500	2148	982	6490	1050	DW16B	DW16A - DW15A - DW15B	TUBELESS	

HD = Heavy Duty version

The information and technical data provided in this catalogue are indicative and may be subject to change without prior notice. For up-to-date data and official product specifications, please refer to the product technical sheet available through your sales representative.





Shop our tires online



**Discover our website
and your legal guarantee rights**

Follow us

