

Technical manual



Technical Manual Index

Application	Technology	Tread pattern	Page
COUNTER-BALANCED FORKLIFT TRUCKS 	Resilient	XP1000 	14
		XP900	18
		XP800	22
		XP700	26
	Pneumatic	TR-900	28
		T-900	30
		T-840	34
	Press On Solid	PS1000 	38
		Trelleborg POS	40
		PS800	48

Application	Technology	Tread pattern	Page
PORTS 	Pneumatic	TR-900	50
		T-900	50
		SR940	52
		CX940	52
	Resilient	XP1000 	54
GROUND SUPPORT EQUIPMENT 	Resilient	Kargo GSE	56
	Pneumatic	Kargo Plus	58
	Press On Solid	GSE POS	58
INDUSTRIAL WHEELS 	Lock Ring Wheels	Premium industrial wheels 8" - 15"	60
		Premium industrial wheels 20" - 24"	60
	Split Wheels	Premium industrial wheels 8" - 12"	61
	Press On Band Wheels	Premium industrial wheels up to 30"	62
	Earthmover Wheels	Premium industrial wheels 25" - 33"	62
	Drop Centre Wheels	Premium industrial wheels up to 30"	63

The information and technical data provided in this catalogue are indicative and may be subject to change without prior notice. For up-to-date data and official product specifications, please refer to the product technical sheet available through your sales representative.

Product range overview

Size Category	Tire Size	Alternative Size	Rim	● Resilient ▼ Radial Pneumatic ■ Bias Pneumatic ◆ Press on solid									
				Maximum Intensity			High Intensity		Medium Intensity			Low Intensity	
				XP1000	PS1000	TR-900	XP900	Trelleborg POS	T-900	XP800	PS800	T-840	XP700
4"	3.00-4/2.10		2.10-4	●						●			
	3.00-4/2.50		2.50C-4	●						●			
	4.00-4/2.50		2.50C-4	●									
5"	8½x4x4		4.00-4										
	9x5x5		5.00-5					◆					
6"	10½x4-6/3.25		3.25I-6	●				◆					
	10x3-6/2.50		2.50-6							●			
	12x4-6/2.50		2.50-6							●			
8"	12x4½x8		4.50-8		◆						◆		
	12x4x8		4.00-8					◆					
	12x5½x8		5.50-8							●			
	13 1/2x4½x8		4.50-8					◆					
	13 1/2x5½x8		5.50-8		◆			◆					
	13x3½x8		3.50-8					◆					
	13x4½x8		4.50-8					◆					
	13x5x8		5.00-8					◆					
	14x4½x8		4.50-8					◆					
	15x4½x8		4.50-8	●						●			
	15x4½-8/3.00	125/75-8	3.00D-8	●			●			●		■	●
	15x4½-8/3.25	125/75-8	3.25D-8	●									
	16x6-8/4.33	150/75-8	4.33R-8	●			●			●			●
	17x7-8/4.33		4.33R-8	●									
	18x7-8/4.33	180/70-8	4.33R-8	●			●		■	●		■	●
	18x9-8/7.00		4.33R-8	●									
9"	4.00-8		3.1/4I-8									■	
	4.00-8/3.00		3.00D-8	●						●			
	4.00-8/3.75		3.75P-8	●									
	5.00-8/3.00		3.00D-8	●		▼	●		■	●		■	●
	5.00-8/3.75		3.75P-8	●									
	140/55-9/4.00	15x5.5-9	4.00E-9	●			●			●			●
	21x8-9/6.00	200/75-9	6.00E-9	●			●			●			●
10"	6.00-9/4.00		4.00E-9	●		▼	●		■	●		■	●
	14x5x10		5.00-10		◆			◆			◆		
	14x6x10		6.00-10					◆					
	15½x5x10		5.00-10					◆					
	180/60-10/5.00		5.00F-10	●									
	200/50-10/6.50		6.50F-10	●			●			●			●
	23x9-10/6.50	225/75-10	6.50F-10	●			●		■	●		■	●
12"	6.50-10/5.00		5.00F-10	●		▼	●		■	●		■	●
	7.50-10		5.00F-10									■	
	23x10-12/8.00	250/60-12	8.00G-12	●			●		■	●		■	●
	27x10-12/8.00	250/75-12	8.00G-12	●			●		■	●		■	●
13"	315/45-12/10.00		10.00G-12	●									
	7.00-12/5.00		5.00S-12	●		▼	●		■	●		■	●
14"	23x5-13/3.75		3.75P-13										
15"	18x7x14		7.00-14					◆					
	21x6x15		6.00-15					◆			◆		
	21x7x15		7.00-15		◆			◆			◆		
	21x8x15		8.00-15		◆			◆			◆		
	21x9x15		9.00-15		◆			◆			◆		
	250-15/7.00	250/70-15	7.00-15	●			●			●			●
	250-15/7.50	250/70-15	7.50-15	●		▼	●		■	●		■	●
	28x12.5-15		12.5-15										
	28x9-15/7.00	225/75-15 (8.15-15)	7.0-15	●		▼	●		■	●		■	●
	300-15/8.00	315/70-15	8.00-15	●		▼	●		■	●		■	●
	355/45-15/9.75	28x12 1/2 -15	9.75-15	●			●			●			●
15"	355/50-15/9.75		9.75-15	●			●			●			
	355/65-15/9.75	32x12 1/2-15 (350-15)	9.75-15	●			●		■	●			●
	400/60-15/11.00		11.00-15	●									

Product range overview

Size Category	Tire Size	Alternative Size	Rim	● Resilient ▼ Radial Pneumatic ■ Bias Pneumatic ◆ Press on solid									
				Maximum Intensity			High Intensity		Medium Intensity			Low Intensity	
				XP1000	PS1000	TR-900	XP900	Trelleborg POS	T-900	XP800	PS800	T-840	XP700
15"	5.50-15/4.50		4.50-15	●									
	6.00-15/4.50		4.50-15	●									
	7.00-15/5.50	29x8-15	5.50-15	●		▼	●		■	●		■	●
	7.00-15/6.00	29x8-15	6.00-15	●						●			
	7.50-15/5.50		5.50-15	●					■			■	
	7.50-15/6.00		6.00-15	●					■			■	
	7.50-15/6.50		6.50-15	●					■	●		■	
	8.25-15/5.50		5.50-15	●									
	8.25-15/6.50		6.50-15	●		▼	●		■	●		■	●
16"	20x5x16		5.00-16					◆					
	22x10x16		10.00-16					◆					
	22x12x16		12.00-16		◆			◆			◆		
	22x14x16		14.00-16					◆					
	22x16x16		16.00-16					◆					
	22x6x16		6.00-16					◆					
	22x7x16		7.00-16					◆					
	22x8x16		8.00-16		◆			◆			◆		
	22x9x16		9.00-16		◆			◆			◆		
	7.50-16/5.50	250/80-16	5.50-16	●									
20'	7.50-16/6.00	250/80-16	6.00G-16	●					■				
	10.00-20/6.50	290/95-20	6.50-20	●						●			
	10.00-20/7.00	290/95-20	7.00-20										
	10.00-20/7.50	290/95-20	7.50-20	●		▼			■	●			
	10.00-20/8.00	290/95-20	8.00-20	●		▼			■	●			
	11.00-20/8.00	300/95-20	8.00-20	●									
	12.00-20/10.00	330/95-20	10.00-20	●									
	12.00-20/8.00	330/95-20	8.00-20	●		▼			■	●			
	12.00-20/8.50	330/95-20	8.50-20	●		▼			■	●			
	26x7x20		7.00-20					◆					
	355/50-20/10.00		10.00-20	●									
	465/55-20/16.00		16.00-20	●									
22'	9.00-20/6.50	270/95-20	6.50-20	●									
	9.00-20/7.00	270/95-20	7.00-20	●					■				
	28x10x22		10.00-22					◆					
	28x12x22		12.00-22		◆			◆			◆		
	28x14x22		14.00-22					◆					
24'	28x16x22		16.00-22					◆					
	12.00-24/10.00	330/95-24	10.00-24	●									
	12.00-24/8.50	330/95-24	8.50-24	●		▼			■				
25'	14.00-24/10.00	385/95-24	10.00-24	●		▼			■				
	14.00-25/11.25		11.25-25	●									
	16.00-25/11.25	445/95-25	11.25-25	●		▼							
	18.00-25		13.00/2.5-25			▼							

For metric POS sizes and further technical details, please refer to the specification tables provided on each product page.

Customer oriented solutions

Combining tire expertise and state-of-the-art technology, Trelleborg anticipates customer needs with highly specialized and highly performing tire solutions to improve productivity and efficiency while optimizing resource utilization. Our premium compounds are meticulously engineered to optimize productivity while maintaining strict adherence to safety regulations, thereby ensuring the well-being of operators.

MULTI PURPOSE

Designed to provide the optimal balance of performance across a wide range of applications.

HEAT SHIELD

High heat resistance for reliable performance in demanding environments up to 200°C.

CHEMICAL RESISTANT

Enhanced resistance to solvents, oils, and grease, with improved traction on wet surfaces.

PRO HD

Increased load-carrying capacity for heavy-duty and overload applications.

NON MARKING

Designed to keep floors free from tire marks with low rolling resistance and excellent heat dissipation.

PRO ENERGY

Reduced energy and fuel consumption through low rolling resistance and excellent heat dissipation.

ELECTRICALLY CONDUCTING

Enhanced safety through static electricity dissipation, preventing sparks in flammable and explosive environments.

PRO TEX

Static discharge and spark protection with non-marking performance for hazardous and clean-floor environments.

Pit Stop Line for safety and tire life

The Pit Stop Line, Trelleborg’s distinctive feature in our premium range, provides operators and fleet managers with precise information on when tire replacement is required.

WASTE ON AVERAGE 25% OF TIRE LIFE DUE TO EARLY REPLACEMENT

UNNECESSARY DOWNTIME AND MONEY WASTE


24% OF TIRES REPLACED TOO LATE

VERY HIGH SAFETY RISK FOR TIRE FAILURE

The Pit Stop Line is an orange strip which appears c.a. 100 hours before the tires need to be replaced. It ensures the tire is only changed when worn out, avoiding to replace it too early and risk spending too much, or replace it too late and risk machine and operator safety.

The right tire in all working conditions

Trelleborg’s unique application intensity rating system helps customers to easily identify the solution that best fits their needs ensuring maximum efficiency and performance.

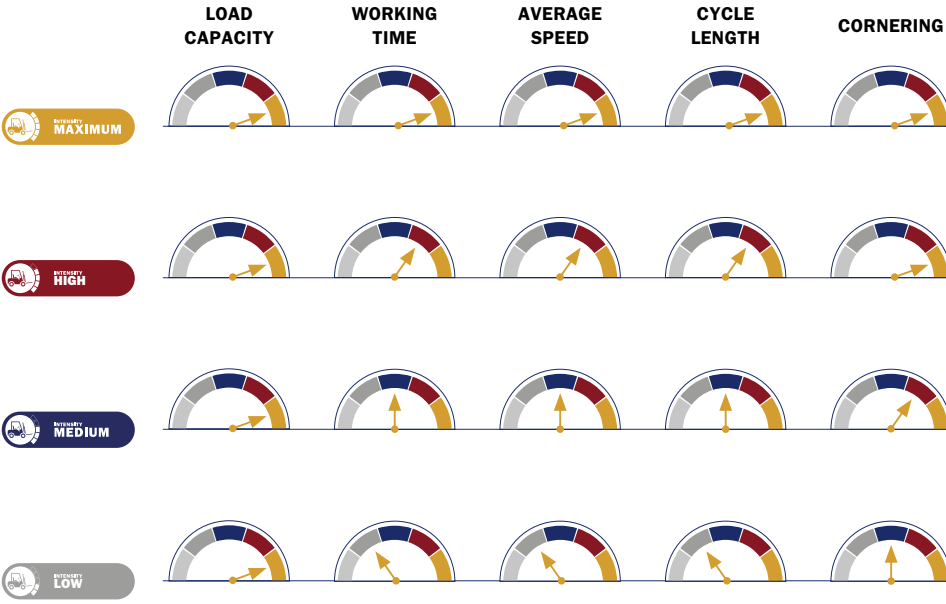

LOAD CAPACITY

Trelleborg tires fall fully under recommended load carrying capacities as indicated by the main worldwide technical organizations.

WORKING TIME

Working solid tires non-stop can potentially cause a buildup of heat and reduce lifespan.

AVERAGE SPEED

High speeds may cause internal stress and deformation leading to overheating, compromising tire performance.

CYCLE LENGTH

Long distances prevent dissipation of heat generated during operations which can create critical separation within the tire.

CORNERING

Repetitive vehicle cornering produces excessive torque on the tire, increasing the likelihood of deformation.

Tire capacity

Press On Band Tire Capacity Table							
Size	Overall Diameter	Section Width	Other Vehicles			Forklift 25km/h	
			@ 6 km/h	@ 10 km/h	@ 16 km/h	Load Wheel	Steering Wheel
10x4x6½	254	102	780	640	555	565	465
9x5x5	229	127	960	790	680	695	570
10x5x6½	254	127	1,010	830	725	735	605
10½x5x6½	267	127	1,070	880	770	780	640
13x4½x8	330	114	1,120	920	800	815	670
16x4x12½	406	102	1,120	920	800	810	665
14x4½x8	356	114	1,170	960	830	850	695
13x5x8	330	127	1,290	1,060	920	935	765
14x5x10	356	127	1,335	1,095	955	970	795
15x5x11¼	381	127	1,390	1,140	990	1,010	830
15½x5x10	394	127	1,470	1,210	1,050	1,070	875
13½x5½x8	343	140	1,510	1,240	1,080	1,095	895
16x5x10½	406	127	1,510	1,240	1,080	1,095	895
16¼x5x11¼	413	127	1,530	1,250	1,090	1,105	905
17x5x12½	432	127	1,570	1,290	1,120	1,145	935
18x5x12½	457	127	1,640	1,350	1,170	1,195	980
15x6x11¼	381	152	1,715	1,410	1,225	1,245	1,020
16x6x10½	406	152	1,910	1,570	1,360	1,390	1,140
16¼x6x11¼	413	152	1,920	1,580	1,370	1,395	1,140
17x6x12½	432	152	1,980	1,630	1,410	1,435	1,180
18x6x12½	457	152	2,100	1,720	1,500	1,525	1,250
16x7x10½	406	178	2,325	1,910	1,660	1,685	1,380
16¼x7x11¼	413	178	2,325	1,900	1,650	1,680	1,380

Press On Band Tire Capacity Table							
Size	Overall Diameter	Section Width	Other Vehicles			Forklift 25km/h	
			@ 6 km/h	@ 10 km/h	@ 16 km/h	Load Wheel	Steering Wheel
22x6x17¾	559	152	2,345	1,925	1,675	1,700	1,395
21x6x15	533	152	2,350	1,930	1,680	1,710	1,400
22x6x16	559	152	2,450	2,000	1,740	1,770	1,450
18x7x12½	457	178	2,550	2,100	1,820	1,855	1,520
21x7x15	533	178	2,875	2,350	2,050	2,085	1,710
22x7x16	559	178	2,975	2,450	2,125	2,160	1,770
18x8x12½	457	203	3,000	2,475	2,150	2,180	1,790
21x8x15	533	203	3,375	2,775	2,425	2,455	2,015
18x9x12½	457	229	3,450	2,850	2,475	2,510	2,060
22x8x16	559	203	3,500	2,875	2,500	2,545	2,085
21x9x15	533	229	3,900	3,200	2,775	2,830	2,320
22x9x16	559	229	4,050	3,325	2,875	2,930	2,400
22x10x16	559	254	4,575	3,750	3,250	3,315	2,720
28x10x22	711	254	5,470	4,490	3,905	3,970	3,255
22x12x16	559	305	5,625	4,625	4,025	4,090	3,350
22x14x16	559	356	6,700	5,505	4,785	4,865	3,990
28x12x22	711	305	6,740	5,540	4,820	4,900	4,015
22x16x16	559	406	7,745	6,360	5,530	5,625	4,610
28x14x22	711	356	8,020	6,590	5,720	5,820	4,780
40x12x30	1,016	305	8,760	7,170	5,690	6,030	5,010
28x16x22	711	406	9,270	7,620	6,620	6,730	5,520
40x14x30	1,016	356	10,610	8,675	6,890	7,300	6,060
40x16x30	1,025	406	12,420	10,160	8,060	8,550	7,095
40x20x30	1,025	508	16,120	13,180	10,460	11,090	9,210

Tire capacity

Resilient Tire Capacity Table						
Size	Rim	Overall Diameter	Section Width	Other Vehicles	Forklift 25km/h	
				Static	Load Wheel	Steering Wheel
3.00-4	2.10-4	252	84	295	260	195
12x4-6	2.5-6	303	91	570	485	375
4.00-4	2.50C-4	307	92	625	535	412
10½x4-6	3.25I-6	268	104	710	610	470
4.00-8	3.75P-8	408	125	1,175	1,010	775
15x4½-8	3.00D-8	377	118	1,210	1,040	800
140/55-9	4.00E-9	380	132	1,360	1,170	900
16x6-8	4.33R-8	411	152	1,740	1,495	1,150
23x5-13	3.75P-13	617	138	1,740	1,495	1,150
5.00-8	3.75P-8	457	152	1,740	1,495	1,150
17x7-8	4.33R-8	430	159	2,160	1,860	1,430
6.00-9	4.00E-9	524	141	2,190	1,885	1,450
18x7-8	4.33R-8	456	158	2,490	2,145	1,650
5.50-15	4.5-15	664	143	2,490	2,145	1,650
6.00-15	4.5-15	694	150	2,720	2,340	1,800
6.50-10	5.00F-10	574	160	2,720	2,340	1,800
180/60-10	5.00F-10	458	157	2,795	2,410	1,850
18x9-8	7.00-8	457	207	2,870	2,470	1,900
200/50-10	6.50F-10	456	197	2,870	2,470	1,900
21x8-9	6.00E-9	514	180	3,200	2,755	2,120
7.00-12	5.00S-12	650	172	3,380	2,920	2,240
23x9-10	6.50F-10	583	200	4,000	3,445	2,650
7.00-15	5.5-15	717	162	4,115	3,545	2,725
7.00-15	6.0-15	730	180	4,115	3,545	2,725

Resilient Tire Capacity Table						
Size	Rim	Overall Diameter	Section Width	Other Vehicles	Forklift 25km/h	
				Static	Load Wheel	Steering Wheel
23x10-12	8.00G-12	583	240	4,380	3,770	2,900
27x10-12	8.00G-12	670	235	4,530	3,900	3,000
28x9-15	7.0-15	692	225	4,530	3,900	3,000
7.50-15	6.0-15	745	194	4,530	3,900	3,000
7.50-16	6.0-16	753	205	4,645	4,000	3,075
315/45-12	10.00G-12	572	279	5,210	4,485	3,450
250-15	7.0-15	709	206	5,510	4,750	3,650
8.25-15	6.5-15	808	207	5,510	4,750	3,650
8.25-20	6.5-20	954	230	5,510	4,380	3,650
280/50-15	8.0-15	670	255	6,040	5,200	4,000
355/45-15	9.75-15	692	287	6,610	5,690	4,375
355/50-15	9.75-15	710	284	6,610	5,690	4,375
300-15	8.0-15	812	255	6,795	5,850	4,500
9.00-20	6.5-20	974	220	6,795	5,400	4,500
10.00-20	8.0-20	1,009	250	7,550	6,000	5,000
11.00-20	8.0-20	1,040	260	8,230	6,540	5,450
355/65-15	9.75-15	812	284	9,060	7,800	6,000
12.00-20	10.0-20	1,090	313	9,815	7,800	6,500
355/50-20	10.0-20	834	310	10,420	8,970	6,900
400/60-15	11.00-15	815	325	10,420	8,970	6,900
12.00-24	10.0-24	1,181	295	11,325	9,000	7,500
465/55-20	16.0-20	1,029	465	13,590	10,800	9,000
14.00-24	10.0-24	1,325	331	13,970	11,100	9,250
16.00-25	11.25-25	1,445	410	18,875	15,000	12,500

For guide purposes only, for design purposes please refer to the specific technical documents for the size in question

COUNTERBALANCED FORKLIFT TRUCKS

XP1000



Resilient tires

Size	Alternative Size	Rim	Tire type & Pattern ● NO LOC ■ LOC ▼ BOTH		
			Traction 	Smooth 	Ribbed 
3.00-4		2.10-4	●		
3.00-4		2.50C-4	●		
4.00-4		2.50C-4	●		
10½x4-6		3.25-6			●
4.00-8		3.00D-8	▼		
4.00-8		3.75P-8	●		●
15x4½-8	125/75-8	3.00D-8	▼		▼
15x4½-8	125/75-8	3.25D-8	●		
5.00-8		3.00D-8	▼		▼
5.00-8		3.75P-8	●		●
16x6-8	150/75-8	4.33R-8	▼		
17x7-8		4.33R-8		●	
18x7-8	180/70-8	4.33R-8	▼	▼	
18x9-8		4.33R-8		●	
140/55-9	15x5.5-9	4.00E-09	▼		
6.00-9		4.00E-09	▼		
21x8-9	200/75-9	6.00E-09	▼		
6.50-10		5.00F-10	▼		
180/60-10		5.00F-10	▼		
200/50-10		6.50F-10	▼		
23x9-10	225/75-10	6.50F-10	▼		
7.00-12		5.00S-12	▼	▼	
23x10-12	250/60-12	8.00G-12	▼	▼	
27x10-12	250/75-12	8.00G-12	▼		
315/45-12		10.00G-12	▼		

AVAILABLE COMPOUNDS

MULTI PURPOSE

HEAT SHIELD

CHEMICAL RESISTANT

PRO HD

NON MARKING

PRO ENERGY

ELECTRICALLY CONDUCTING

PRO TEX



Product Dimensions [mm]		Load Capacity [kg]		
Overall Diameter	Section Width	Other	Counterbalanced Lift Trucks up to 25 km/h	
		Static	Load Wheel	Steering Wheel
251	83	295	260	195
251	83	295	260	195
308	92	625	535	410
268	104	710	610	470
403	108	1.100	950	730
403	124	1.175	1.010	775
375	114	1.210	1.040	800
372	114	1.210	1.040	800
453	119	1.650	1.415	1.090
453	144	1.740	1.495	1.150
410	153	1.740	1.495	1.150
432	157	2.160	1.860	1.430
454	156	2.490	2.145	1.650
458	207	2.870	2.470	1.900
376	136	1.360	1.170	900
523	139	2.190	1.885	1.450
516	187	3.200	2.755	2.120
569	162	2.720	2.340	1.800
454	161	2.795	2.410	1.850
453	200	2.870	2.470	1.900
582	201	4.000	3.445	2.650
650	174	3.380	2.920	2.240
581	239	4.380	3.770	2.900
675	238	4.530	3.900	3.000
570	292	5.210	4.485	3.450



COUNTERBALANCED FORKLIFT TRUCKS

XP1000



Resilient tires

Size	Alternative Size	Rim	Tire type & Pattern ● NO LOC ■ LOC ▼ BOTH			Product Dimensions [mm]		Load Capacity [kg]		
			Traction 	Smooth 	Ribbed 	Overall Diameter	Section Width	Other Static	Counterbalanced Lift Trucks up to 25 km/h Load Wheel	Steering Wheel
23x5-13		3.75P-13	▼			617	138	1.740	1.495	1.150
5.50-15		4.5-15	●			661	150	2.490	2.145	1.650
6.00-15		4.5-15	▼			692	158	2.720	2.340	1.800
7.00-15	29x8-15	5.5-15	▼			722	195	4.115	3.545	2.725
7.00-15	29x8-15	6.0-15	▼			722	195	4.115	3.545	2.725
7.50-15		5.5-15	●			745	204	4.530	3.900	3.000
7.50-15		6.0-15	●			745	204	4.530	3.900	3.000
7.50-15		6.5-15	▼			745	204	4.530	3.900	3.000
8.25-15		5.5-15	●			805	210	5.360	4.615	3.550
8.25-15		6.5-15	▼			805	210	5.510	4.750	3.650
28x9-15	225/75-15 (8.15-15)	7.0-15	▼			687	222	4.530	3.900	3.000
250-15	250/70-15	7.0-15	▼			709	231	5.510	4.745	3.650
250-15	250/70-15	7.5-15	▼			709	242	5.510	4.745	3.650
300-15	315/70-15	8.0-15	▼	▼		808	257	6.795	5.850	4.500
355/45-15	28x12½-15	9.75-15	▼			680	294	6.610	5.690	4.375
355/50-15		9.75-15	▼			712	296	6.610	5.690	4.375
355/65-15	32x12½-15 (350-15)	9.75-15	▼			816	296	9.060	7.800	6.000
400/60-15		11.00-15	●			822	327	10.420	8.970	6.900
7.50-16	250/80-16	5.5-16	●			801	205	4.645	4.000	3.075
7.50-16	250/80-16	6.0-16	●			801	205	4.645	4.000	3.075
9.00-20	270/95-20	6.5-20	●			985	231	6.795	5.400	4.500
9.00-20	270/95-20	7.0-20	●			985	231	6.795	5.400	4.500
10.00-20	290/95-20	6.5-20	●			1.026	263	7.365	5.850	4.875
10.00-20	290/95-20	7.5-20	●	●		1.018	256	7.550	6.000	5.000
10.00-20	290/95-20	8.0-20	●			1.025	263	7.550	6.000	5.000

AVAILABLE COMPOUNDS

MULTI PURPOSE

HEAT SHIELD

CHEMICAL RESISTANT

PRO HD

NON MARKING

PRO ENERGY

ELECTRICALLY CONDUCTING

PRO TEX



COUNTERBALANCED FORKLIFT TRUCKS

XP1000



Resilient tires

Size	Alternative Size	Rim	Tire type & Pattern ● NO LOC ■ LOC ▼ BOTH		
			Traction 	Smooth 	Ribbed 
11.00-20	300/95-20	8.0-20	●		
12.00-20	330/95-20	8.0-20	●	●	
12.00-20	330/95-20	8.5-20	●	●	
12.00-20	330/95-20	10.0-20	●	●	
355/50-20		10.0-20	▼	▼	
465/55-20		16.0-20	●		
12.00-24	330/95-24	8.5-24	●		
12.00-24	330/95-24	10.0-24	●		
14.00-24	385/95-24	10.0-24	●		
14.00-25		11.25-25	●		
16.00-25	445/95-25	11.25-25	●		

AVAILABLE COMPOUNDS



Product Dimensions [mm]		Load Capacity [kg]		
Overall Diameter	Section Width	Other	Counterbalanced Lift Trucks up to 25 km/h	
		Static	Load Wheel	Steering Wheel
1.052	263	8.230	6.540	5.450
1.092	267	9.515	7.560	6.300
1.092	267	9.515	7.560	6.300
1.093	324	9.815	7.800	6.500
831	321	10.420	8.970	6.900
1.014	464	13.590	10.800	9.000
1.185	315	10.120	8.040	6.700
1.186	317	11.325	9.000	7.500
1.321	334	13.970	11.100	9.250
1.323	380	14.850	11.800	9.825
1.440	405	18.875	15.000	12.500



COUNTERBALANCED FORKLIFT TRUCKS

XP900

Resilient tires



AVAILABLE COMPOUNDS



Size	Alternative Size	Rim	Tire type & Pattern ● NO LOC ■ LOC ▼ BOTH		Product Dimensions [mm]		Load Capacity [kg]		
			Traction A 	Traction B 	Overall Diameter	Section Width	Other	Counterbalanced Lift Trucks up to 25 km/h	
							Static	Load Wheel	Steering Wheel
15x4½-8	125/75-8	3.00D-8	▼		377	122	1.210	1.040	800
5.00-8		3.00D-8	▼		449	122	1.650	1.415	1.090
16x6-8	150/75-8	4.33R-8	▼		412	154	1.740	1.495	1.150
18x7-8	180/70-8	4.33R-8	▼		456	148	2.490	2.145	1.650
140/55-9	15x5.5-9	4.00E-9	▼		379	132	1.360	1.170	900
6.00-9		4.00E-9	▼		529	142	2.190	1.885	1.450
21x8-9	200/75-9	6.00E-9	▼		515	189	3.200	2.755	2.120
6.50-10		5.00F-10	▼		573	167	2.720	2.340	1.800
200/50-10		6.50F-10		▼	453	192	2.870	2.470	1.900
23x9-10	225/75-10	6.50F-10	▼		584	211	4.000	3.445	2.650
7.00-12		5.00S-12	▼		657	172	3.380	2.920	2.240
23x10-12	250/60-12	8.00G-12		▼	577	235	4.380	3.770	2.900
27x10-12	250/75-12	8.00G-12	▼		676	233	4.530	3.900	3.000
7.00-15	29x8-15	5.5-15	▼		723	189	4.115	3.545	2.725
8.25-15		6.5-15	▼		813	209	5.510	4.750	3.650
28x9-15	225/75-15 (8.15-15)	7.0-15	▼		694	212	4.530	3.900	3.000
250-15	250/70-15	7.0-15	▼		716	215	5.510	4.745	3.650
250-15	250/70-15	7.5-15	▼		716	215	5.510	4.745	3.650
300-15	315/70-15	8.0-15	▼		813	242	6.795	5.850	4.500
355/45-15	28x12½-15	9.75-15		▼	685	284	6.610	5.690	4.375
355/50-15		9.75-15		▼	713	283	6.610	5.690	4.375
355/65-15	32x12½-15 (350-15)	9.75-15	▼		817	305	9.060	7.800	6.000



COUNTERBALANCED FORKLIFT TRUCKS

XP800

Resilient tires



AVAILABLE COMPOUNDS



Size	Alternative Size	Rim	Tire type & Pattern ● NO LOC ■ LOC ▼ BOTH		Product Dimensions [mm]		Load Capacity [kg]		
			Traction 		Overall Diameter	Section Width	Other	Counterbalanced Lift Trucks up to 25 km/h	
							Static	Load Wheel	Steering Wheel
3.00-4		2.10-4	●		249	81	295	260	195
3.00-4		2.50C-4	●		249	81	295	260	195
10x3-6	3.00-6/2.5	2.50C-6	●		250	84	260	220	170
12x4-6	4.00-6/2.5	2.50C-6	●		303	91	570	485	375
4.00-8		3.00D-8	▼		404	108	1.100	950	730
5.00-8		3.00D-8	▼		453	124	1.650	1.415	1.090
15x4½-8	125/75-8	3.00D-8	▼		376	122	1.210	1.040	800
16x6-8	150/75-8	4.33R-8	▼		413	155	1.740	1.495	1.150
18x7-8	180/70-8	4.33R-8	▼		449	162	2.490	2.145	1.650
140/55-9	15x5.5-9	4.00E-9	▼		374	141	1.390	1.170	900
6.00-9		4.00E-9	▼		524	148	2.190	1.885	1.450
21x8-9	200/75-9	6.00E-9	▼		519	190	3.200	2.755	2.120
6.50-10		5.00F-10	▼		570	167	2.720	2.340	1.800
200/50-10		6.50F-10	▼		453	201	2.870	2.470	1.900
23x9-10	225/75-10	6.50F-10	▼		578	202	4.000	3.445	2.650
7.00-12		5.00S-12	▼		652	178	3.380	2.920	2.240
23x10-12	250/60-12	8.00G-12	▼		575	242	4.380	3.770	2.900
27x10-12	250/75-12	8.00G-12	▼		675	243	4.530	3.900	3.000
7.00-15	29x8-15	5.5-15	▼		724	196	4.115	3.545	2.725
7.00-15	29x8-15	6.0-15	●		724	196	4.115	3.545	2.725
7.50-15		6.5-15	▼		746	212	4.530	3.900	3.000
8.25-15		6.5-15	▼		812	211	5.510	4.750	3.650



COUNTERBALANCED FORKLIFT TRUCKS

XP800



Resilient tires

AVAILABLE COMPOUNDS



Size	Alternative Size	Rim	Tire type & Pattern ● NO LOC ■ LOC ▼ BOTH		Product Dimensions [mm]		Load Capacity [kg]		
			Traction 		Overall Diameter	Section Width	Other	Counterbalanced Lift Trucks up to 25 km/h	
							Static	Load Wheel	Steering Wheel
28x9-15	225/75-15 (8.15-15)	7.0-15	▼		687	226	4.530	3.900	3.000
250-15	250/70-15	7.0-15	▼		713	244	5.510	4.745	3.650
250-15	250/70-15	7.5-15	▼		713	244	5.510	4.745	3.650
300-15	315/70-15	8.0-15	▼		810	259	6.795	5.850	4.500
355/45-15	28x12.5-15	9.75-15	▼		681	295	6.610	5.690	4.375
355/50-15		9.75-15	▼		711	296	6.610	5.690	4.375
355/65-15	32x12.5-15 (350-15)	9.75-15	▼		817	295	9.060	7.800	6.000
10.00-20	290/95-20	7.0-20	●		1033	268	7.550	6.000	5.000
10.00-20	290/95-20	7.5-20	●		1033	268	7.550	6.000	5.000
10.00-20	290/95-20	8.0-20	●		1033	268	7.550	6.000	5.000
12.00-20	330/95-20	8.0-20	●		1094	297	9.515	7.560	6.300
12.00-20	330/95-20	8.5-20	●		1094	297	9.515	7.560	6.300



COUNTERBALANCED FORKLIFT TRUCKS

XP700

Resilient tires



AVAILABLE COMPOUNDS



Size	Alternative Size	Rim	Tire type & Pattern ● NO LOC ■ LOC ▼ BOTH		Product Dimensions [mm]		Load Capacity [kg]		
					Overall Diameter	Section Width	Other	Counterbalanced Lift Trucks up to 25 km/h	
							Static	Load Wheel	Steering Wheel
15x4½-8	125/75-8	3.00D-8	▼		372	103	1.210	1.040	800
5.00-8		3.00D-8	▼		457	122	1.650	1.415	1.090
16x6-8	150/75-8	4.33R-8	▼		408	143	1.740	1.495	1.150
18x7-8	180/70-8	4.33R-8	▼		450	143	2.490	2.145	1.650
140/55-9	15x5.5-9	4.00E-9	▼		370	127	1.360	1.170	900
6.00-9		4.00E-9	▼		508	140	2.190	1.885	1.450
21x8-9	200/75-9	6.00E-9	▼		508	185	3.200	2.755	2.120
6.50-10		5.00F-10	▼		559	163	2.720	2.340	1.800
200/50-10		6.50F-10	▼		447	186	2.870	2.470	1.900
23x9-10	225/75-10	6.50F-10	▼		571	190	4.000	3.445	2.650
7.00-12		5.00S-12	▼		660	168	3.380	2.920	2.240
23x10-12	250/60-12	8.00G-12	▼		571	224	4.380	3.770	2.900
27x10-12	250/75-12	8.00G-12	▼		656	230	4.530	3.900	3.000
7.00-15		5.5-15	▼		711	178	4.115	3.545	2.725
8.25-15		6.5-15	▼		787	206	5.510	4.750	3.650
28x9-15	225/75-15 (8.15-15)	7.0-15	▼		686	204	4.000	3.445	2.650
250-15	250/70-15	7.0-15	▼		704	216	5.510	4.745	3.650
300-15	315/70-15	8.0-15	▼		812	254	6.795	5.850	4.500
355/65-15	32x12½-15 (350-15)	9.75-15	▼		809	278	9.060	7.800	6.000
250-15	250/70-15	7.5-15	▼		704	216	5.510	4.745	3.650



COUNTERBALANCED FORKLIFT TRUCKS

TR-900



Radial pneumatic



Size	Alternative Size	Rim	Tire type & Pattern ● Tube Type ■ Tubeless ▼ Both			Product Dimensions [mm]			Minimal Dual Spacing [mm]	Inflation Pressure [bar]	Load Index	Speed Symbol	Load Capacity [kg]	
			Traction A	Traction B		Overall Diameter	Section Width	Tread Depth					Counterbalanced Lift Trucks up to 25 km/h	
													Load Wheel	Steering Wheel
5.00R8		3.00D-8	●			468	137	25	158	10	111	A5	1.415	1.090
6.00R9		4.00E-9	●			540	162	25	192	10	121	A5	1.885	1.450
6.50R10		5.00F-10	●			585	180	27	212	10	128	A5	2.340	1.800
7.00R12		5.00S-12	●			670	190	28	230	10	136	A5	2.915	2.240
28x9R15	225/75R15 (8.15R15)	7.0-15	●			706	230	25	248	10	149	A5	4.225	3.250
7.00R15	29x8R15	5.5-15	●			736	195	28	236	10	143	A5	3.540	2.725
250R15	250/70R15	7.0-15	●			736	252	27	282	10	153	A5	4.745	3.650
300R15	315/70R15	8.0-15	●			835	312	36	345	10	165	A5	6.695	5.150
8.25R15		6.5-15	●			838	232	32	281	10	153	A5	4.745	3.650
10.00R20	290/95R20	7.5-20	●			1.062	294	35	334	10	166	A5	6.890	5.300
12.00R20	330/95R20	8.5-20	●			1.136	320	41	378	10	176	A5	9.230	7.100
12.00R24	330/95R24	8.5-24	●			1.232	322	39	378	10	178	A5	9.750	7.500
14.00R24	385/95R24	10.0-24	▼			1.416	390	64	450	10	193	A5	14.950	11.500
16.00R25	445/95R25	11.0-25			■	1.495	424	56	529	10	200	A5	18.200	14.000
18.00R25		13.0-25	■			1.636	478	68	575	10	207	A5	22.750	17.500
18.00R33		13.0-33	■			1.838	497	74	598	10	214	A5	27.560	21.200

COUNTERBALANCED FORKLIFT TRUCKS

T-900



Bias pneumatic



Size	Alternative Size	Ply Rating	Rim	Tire type & Pattern ● Tube Type ■ Tubeless ▼ Both		Product Dimensions [mm]			Minimal Dual Spacing [mm]	Inflation Pressure [bar]	Load Index	Speed Symbol	Load Capacity [kg]	
				Overall Diameter		Section Width	Tread Depth	Counterbalanced Lift Trucks up to 25 km/h						
								Load Wheel					Steering Wheel	
5.00-8		10	3.00D-8	●		468	140	13	158	10	111	A5	1.415	1.090
18x7-8	180/70-8	16	4.33R-8	●		462	168	16	199	10	125	A5	2.145	1.650
6.00-9		12	4.00E-9	●		543	160	15	192	10	121	A5	1.885	1.450
23x9-10	225/75-10	20	6.50F-10	●		585	230	19	259	10	142	A5	3.445	2.650
6.50-10		12	5.00F-10	●		590	182	18	212	9	125	A5	2.145	1.650
23x10-12	250/60-12	20	8.00G-12	●		600	245	22	293	10	145	A5	3.770	2.900
7.00-12		14 16	5.00S-12	●		680	191	18	230	9 10	134 136	A5 A5	2.755 2.910	2.120 2.240
27x10-12	250/75-12	16 24	8.00G-12	●		685	250	22	293	8 10,4	146 155	A5 A5	3.900 5.040	3.000 3.875
28x9-15	225/75-15 (8.15-15)	14	7.0-15	●		710	230	18	248	10	146	A5	3.900	3.000
250-15	250/70-15	20	7.0-15	●		742	240	19	282	10	155	A5	5.040	3.875
7.00-15	29x8-15	14	5.5-15	●		760	204	20	236	8,8	140	A5	3.275	2.520
7.50-15		16	6.0-15	●		778	215	21	254	10	146	A5	3.900	3.000
7.50-16	250/80-16	12	6.00G-16	●		805	220	21	254	8	144	A5	3.630	2.790
300-15	315/70-15	20	8.0-15	●		840	290	23	345	9	164	A5	6.500	5.000
8.25-15		14 16	6.5-15	●		841	247	19	281	8 9,3	149 152	A5 A5	4.225 4.615	3.250 3.550
355/65-15	32x12½-15 (350-15)	24 32	9.75-15	●		843	334	29	407	10 12,5	170 177	A5 A5	7.800 9.490	6.000 7.300



COUNTERBALANCED FORKLIFT TRUCKS



Bias pneumatic



Size	Alternative Size	Ply Rating	Rim	Tire type & Pattern ● Tube Type ■ Tubeless ▼ Both	Product Dimensions [mm]			Minimal Dual Spacing [mm]	Inflation Pressure [bar]	Load Index	Speed Symbol	Load Capacity [kg]	
				Traction 	Overall Diameter	Section Width	Tread Depth					Counterbalanced Lift Trucks up to 25 km/h	
												Load Wheel	Steering Wheel
355/65-15	32x12½-15 (350-15)	32	9.00-15	■	843	334	29	407	12,5	177	A5	9.490	7.300
9.00-20	270/95-20	14	7.0-20	●	1.015	265	27	311	9	160	A5	5.850	4.500
10.00-20	290/95-20	16	7.5-20	●	1.085	294	32	334	9	164	A5	6.500	5.000
11.00-20	300/95-20	18	8.0-20	●	1.110	302	33	352	10	170	A5	7.800	6.000
12.00-20	330/95-20	20	8.0-20	●	1.145	325	35	372	10	175	A5	8.970	6.900
		24							10,4	178	A5	9.710	7.470
		28							10,9	180	A5	10.400	8.000
12.00-24	330/95-24	20	8.5-24	●	1.245	320	35	378	10	178	A5	9.750	7.500
		24							10,4	178	A5	9.945	7.650
14.00-24	385/95-24	24	10.00W-24	▼	1.360	380	39	450	10	186	A5	12.350	9.500
		28							10,4	186	A5	12.600	9.690



COUNTERBALANCED FORKLIFT TRUCKS

T-840



Bias pneumatic



Size	Alternative Size	Ply Rating	Rim	Tire type & Pattern ● Tube Type ■ Tubeless ▼ Both	Product Dimensions [mm]	Minimal Dual Spacing [mm]	Inflation Pressure [bar]	Load Index	Speed Symbol	Load Capacity [kg]			
				Traction 						Counterbalanced Lift Trucks up to 25 km/h			
										Load Wheel	Steering Wheel		
15x4.5-8	125/75-8	12	3.00D-8	●	381	117	8	140	10	100	A5	1.040	800
4.00-8		8 10	3 1/4I-8	●	414	112	6	138	9 10	94 97	A5 A5	870 950	670 730
16x6-8	150/75-8	16	4.33R-8	●	425	152	12	175	10	113	A5	1.495	1.150
18x7-8	180/70-8	14 16	4.33R-8	●	462	173	14	199	9 10	121 125	A5 A5	1.885 2.145	1.450 1.650
5.00-8		8 10	3.00D-8	●	467	132	11	158	8,25 10	106 111	A5 A5	1.235 1.415	950 1.090
21x8-9	200/75-9	14 16	6.00E-9	●	535	200	15	230	9 10	131 134	A5 A5	2.535 2.755	1.950 2.120
6.00-9		10 12	4.00E-9	●	540	160	13	192	8,50 10	118 121	A5 A5	1.715 1.885	1.320 1.450
6.50-10		10 12 14	5.00F-10 (5.50F-10)	●	588	177	14	212 (218)	7,75 9 10	122 125 128	A5 A5 A5	1.950 2.145 2.340	1.500 1.650 1.800
23x10-12	250/60-12	16	8.00G-12	●	594	243	20	293	8	139	A5	3.160	2.430
23x9-10	225/75-10	20	6.50F-10	●	595	225	16	259	10	142	A5	3.340	2.650
7.50-10		12	5.00F-10	●	643	205	15	242	8	133	A5	2.680	2.060
7.00-12		12 14 16	5.00S-12	●	672	192	15	230	8,50 9 10	133 134 136	A5 A5 A5	2.680 2.755 2.910	2.060 2.120 2.240
27x10-12	250/75-12	14 16 20	8.00G-12	●	681	261	18	293	7 8 10	143 146 152	A5 A5 A5	3.545 3.900 4.615	2.725 3.000 3.550



COUNTERBALANCED FORKLIFT TRUCKS

T-840



Bias pneumatic



Size	Alternative Size	Ply Rating	Rim	Tire type & Pattern		Product Dimensions [mm]			Minimal Dual Spacing [mm]	Inflation Pressure [bar]	Load Index	Speed Symbol	Load Capacity [kg]	
				● Tube Type	■ Tubeless								Counterbalanced Lift Trucks up to 25 km/h	
				▼ Both										
				Traction			Load Wheel	Steering Wheel						
8.15-15	28x9-15	14	7.0-15	●		707	216	18	248	10	146	A5	3.900	3.000
28x12.5-15		20	9.75-15	●		728	274	17	397	9	151	A5	4.535	3.490
250-15	250/70-15	18 20	7.50-15	●		735	250	20	288	9,50 10	153 155	A5 A5	4.745 5.040	3.650 3.875
7.00-15		14	5.50-15 (6.0-15)	●		748	198	17	236 (242)	9,25	140	A5	3.250	2.500
7.50-15		14 16	6.0-15 (6.5-15)	●		772	212	21	254 (260)	9,25 10	144 146	A5 A5	3.640 3.900	2.800 3.000
8.25-15		14 18	6.5-15	●		836	234	23	281	8 10	149 153	A5 A5	4.225 4.745	3.250 3.650
300-15	315/70-15	20 22	8.00-15	●		840	300	23	345	9 10	164 165	A5 A5	6.500 6.695	5.000 5.150

Inflation pressure disclaimer for all industrial pneumatic tires

- Most tire damages are due to, or aggravated by, incorrect inflation pressures.
 - Under-inflation causes over-heating and can greatly shorten the life of a tire. It reduces stability and can cause irregular wear, internal damage and, ultimately, even tire break-up.
 - Over-inflation causes the tire to be more susceptible to impact damage and in extreme cases may result in rim deformation or even a tire burst.
 - Inflation pressures must be checked regularly at least once a fortnight - These checks should be made only when tires are cold because pressure rises as they warm up in running. Never bleed warm tires.
- Cold inflation pressures must always comply with the vehicle or tire manufacturer's recommendations for the vehicle, type of tire and the intended service. Pressure increase during running, which may reach or even exceed 20%, is normal and is allowed for in the design of the tire. Therefore the inflation pressure of warm tires must never be adjusted back to the recommended (cold) values.
 - Note that the valve cap, which must be of the sealing type, acts as a supplementary air seal and should be fitted at all times.



COUNTERBALANCED FORKLIFT TRUCKS

PS1000

Press on solid



AVAILABLE COMPOUNDS



Size	Alternative Size	Tire type & Pattern ● Smooth flat (FL) ■ Traction flat (GL/GS)		Load Capacity [kg]				
		Smooth	Traction	All Vehicles Static	Other Vehicles		Counterbalanced Lift Trucks up to 25 km/h	
					10 km/h	16 km/h	Load Wheel	Steering Wheel
10x4x6½	254x102x165	●		1.175	640	555	565	465
10x5x6½	254x127x165	●	■	1.530	830	725	735	605
12x4½x8	305x114x203	●	■	1.570	860	745	755	620
13½x5½x8	343x140x203	●	■	2.285	1.240	1.080	1.095	895
14x4½x8	356x114x203	●		1.770	960	830	850	695
14x5x10	356x127x254	●	■	2.020	1.095	955	970	795
15x5x11¼	381x127x286	●	■	2.100	1.140	990	1.010	830
16x5x10½	406x127x267	●	■	2.275	1.240	1.080	1.095	895
16x6x10½	406x152x267	●	■	2.875	1.570	1.360	1.390	1.140
16x7x10½	406x178x267	●		3.500	1.910	1.660	1.685	1.380
16¼x5x11¼	413x127x286	●		2.300	1.250	1.090	1.105	905
16¼x6x11¼	413x152x286	●	■	2.890	1.580	1.370	1.395	1.140
16¼x7x11¼	413x178x286	●		3.500	1.900	1.650	1.680	1.380
18x6x12½	457x152x308	●	■	3.155	1.720	1.500	1.525	1.250
18x7x12½	457x178x308	●	■	3.855	2.100	1.820	1.855	1.520
18x8x12½	457x203x308	●		4.530	2.475	2.150	2.180	1.790
21x7x15	533x178x381	●	■	4.335	2.350	2.050	2.085	1.710
21x8x15	533x203x381	●	■	5.100	2.775	2.425	2.445	2.015
21x9x15	533x229x381	●		5.890	3.200	2.775	2.830	2.320
22x8x16	559x203x406	●		5.285	2.875	2.500	2.545	2.085
22x9x16	559x229x406	●	■	6.110	3.325	2.875	2.930	2.400
22x12x16	559x305x406	●	■	8.515	4.625	4.025	4.090	3.350
28x12x22	711x305x559	●		10.190	5.540	4.820	4.900	4.015

COUNTERBALANCED FORKLIFT TRUCKS

Trelleborg POS



Press on solid

AVAILABLE COMPOUNDS



Size inch	Metric Size	Tire type & Pattern			Product Dimensions [mm]		Load Capacity [kg]				
		● Smooth crowned (PL) ■ Smooth flat (FL) ▼ Traction flat (GL/GS) ◆ Traction crowned (TR)					All Vehicles Static		Other Vehicles		Counterbalanced Lift Trucks up to 25 km/h
		Smooth 	Traction 		Overall Diameter	Section Width	0 km/h	10 km/h	16 km/h	Load Wheel	Steering Wheel
8½x4x4	216x102x102	●			216	102	1.055	570	500	505	415
8x4½x4½	203x114x114	●			203	114	1.155	625	545	550	455
9x5x5	229x127x127	■			229	127	1.450	790	680	695	570
10x4x6¼	254x102x159	■			254	102	1.185	640	560	565	465
10x4x6½	254x102x165	■			254	102	1.175	640	555	565	465
10x4¾x6½	254x121x165	●			254	121	1.435	780	675	690	565
10x5x6½	254x127x165	■			254	127	1.530	830	725	735	605
10½x5x6½	267x127x165	■		▼	267	127	1.625	880	770	780	640
10x7x6¼	254x178x159	●			254	178	2.310	1.255	1.090	1.110	910
10½x7x6½	267x178x165	■			267	178	2.420	1.310	1.140	1.160	950
12x4x8	305x102x203	●			305	102	1.365	745	645	660	540
13½X4½X8	343x114x203	●			343	144	1.740	940	800	815	670
13x3½x8	330x89x203		▼		330	89	1.025	645	615	570	470
13x4½x8	330x114x203	■		▼	330	144	1.695	920	800	815	670
13x5x8	330x127x203			▼	330	127	1.945	1.060	920	935	765
13½x5½x8	343x140x203	■		▼	343	140	2.285	1.240	1.080	1.095	895
14x4½x8	356x114x203	● ■		▼	356	114	1.770	960	830	850	695
14x5x10	356x127x254	■		◆	356	127	2.020	1.095	955	970	795
14x6x10	356x152x254	●			356	152	2.530	1.370	1.190	1.201	995
15x5x11¼	381x127x286	● ■		▼	381	127	2.100	1.140	990	1.010	830
15x6x11¼	381x152x286	■		▼	381	152	2.595	1.410	1.225	1.245	1.020
15½x5x10	394x127x254	■		▼	394	127	2.225	1.210	1.050	1.070	875
15x8x11¼	381x203x286	●			381	203	3.605	1.960	1.705	1.735	1.420
16x4x12¼	406x102x308	●			406	102	1.695	920	800	810	665
16x5x10½	406x127x267	● ■		▼	406	127	2.275	1.240	1.080	1.095	895
16x6x10½	406x152x267	● ■		▼	406	152	2.875	1.570	1.360	1.390	1.140
16x7x10½	406x178x267			▼	406	178	3.500	1.910	1.660	1.685	1.380
16¼x5x11¼	413x127x286	● ■		▼	413	127	2.300	1.250	1.090	1.105	905
16¼x6x11¼	413x152x286	● ■		▼	413	152	2.890	1.580	1.370	1.395	1.140
16¼x7x11¼	413x178x286			▼	413	178	3.500	1.900	1.650	1.680	1.380
17x4½x12¼	432x114x308			▼	432	114	2.070	1.130	980	995	815
17x5x12¼	432x127x308	■		▼	432	127	2.380	1.290	1.120	1.145	935



COUNTERBALANCED FORKLIFT TRUCKS

Trelleborg POS



Press on solid

AVAILABLE COMPOUNDS



Size inch	Metric Size	Tire type & Pattern ● Smooth crowned (PL) ■ Smooth flat (FL) ▼ Traction flat (GL/GS) ◆ Traction crowned (TR)		Product Dimensions [mm]		Load Capacity [kg]				
		Smooth	Traction			All Vehicles Static	Other Vehicles		Counterbalanced Lift Trucks up to 25 km/h	
						0 km/h	10 km/h	16 km/h	Load Wheel	Steering Wheel
17x6x12 ¹ / ₈	432x152x308		▼	432	152	2.980	1.630	1.410	1.435	1.180
18x5x12 ¹ / ₈	457x127x308	■	▼	457	127	2.480	1.350	1.170	1.195	980
18x6x12 ¹ / ₈	457x152x308	● ■	▼	457	152	3.155	1.720	1.500	1.525	1.250
18x7x12 ¹ / ₈	457x178x308	● ■	▼	457	178	3.855	2.100	1.820	1.855	1.520
18x8x12 ¹ / ₈	457x203x308	● ■	▼	457	203	4.530	2.475	2.150	2.180	1.790
18x9x12 ¹ / ₈	457x229x308	■	▼	457	229	5.230	2.850	2.475	2.510	2.060
18x7x14	457x178x356	●		457	178	3.555	1.980	1.720	1.750	1.435
21x6x15	533x152x381		▼	533	152	3.540	1.930	1.680	1.710	1.400
21x7x15	533x178x381	● ■		533	178	4.335	2.350	2.050	2.085	1.710
21x8x15	533x203x381	● ■	▼	533	203	5.100	2.775	2.425	2.455	2.015
21x9x15	533x229x381	■	▼	533	229	5.890	3.200	2.775	2.830	2.320
20x5x16	508x127x406	●		508	127	2.640	1.440	1.250	1.270	1.040
22x7x16	559x178x406	■	▼	559	178	4.495	2.450	2.125	2.160	1.770
22x7x17 ¹ / ₄	558x178x451	■	◆	558	178	4.290	2.330	2.025	2.060	1.690
22x8x16	559x203x406	● ■	▼	559	203	5.285	2.875	2.500	2.545	2.085
22x8x17 ¹ / ₄	559x203x451	■		559	203	4.955	2.690	2.340	2.380	1.950
22x9x16	559x229x406	■	▼	559	229	6.110	3.325	2.875	2.930	2.400
22x10x16	559x254x406	■	▼	559	254	6.900	3.750	3.250	3.315	2.720
22x12x16	559x305x406	■	▼	559	305	8.515	4.625	4.025	4.090	3.350
22x14x16	559x356x406	■		559	356	10.130	5.505	4.785	4.865	3.990
22x16x16	559x406x406	■		559	406	11.715	6.360	5.530	5.625	4.610
22x6x17 ¹ / ₄	559x152x451	■		559	152	3.545	1.925	1.675	1.700	1.395
26x7x20	660x178x508	■		660	178	5.090	2.775	2.400	2.445	2.005
28x10x22	711x254x559	■		711	254	8.260	4.490	3.905	3.970	3.255
28x12x22	711x305x559	■	▼	711	305	10.190	5.540	4.820	4.900	4.015
28x14x22	711x356x559	■		711	356	12.125	6.590	5.720	5.820	4.780
28x16x22	711x406x559	■		711	406	14.015	7.620	6.620	6.730	5.520
40x12x30	1016x305x762	■		1016	305	13.195	7.170	5.690	6.030	5.010
40x14x30	1016x356x762	■		1016	356	15.985	8.675	6.890	7.300	6.060
40X16X30	1016x406x762	■		1016	406	18.710	10.160	8.060	8.550	7.095
40X20X30	1016x508x763	■		1016	508	24.285	13.180	10.460	11.090	9.210



Size mm	Tire type & Pattern	
	● Smooth crowned (PL) ■ Smooth flat (FL) ▼ Traction flat (GL/GS) ◆ Traction crowned (TR)	
	Smooth	Traction
125x50x75	■	
150x50x100	■	
150x75x100	■	
160x50x100	■	
186X70-120	■	
200x75x100	■	
200x85x105	■	
200x130x105	■	
170x45x120	■	
180x75x120	■	
175x50x125	■	
200x50x140	■	
250x75x140	■	
250x130x140	■	▼
260x75x140	■	
280x75x140	■	
254x90x145	■	
250x90x150	■	
220x60x160	■	
230x75x170	■	
250x80x170	■	
250x105x170	■	
260x85x170	■	▼
260x105x170	■	▼
260x130x170	■	
300x85x170	■	
315x145x180	■	
330x145x180	■	
250x50x190	■	
250x85x190	■	
330x145x194	■	
300x90x203	■	
300x100x203	■	▼
313x130x203	■	▼
280x75x220	■	
285x75x220	■	
310x60x220	■	
300x75x225	■	
300x75x240	■	
300x75x240	■	
360x60x270	■	
360x75x270	■	

AVAILABLE COMPOUNDS



Product Dimensions [mm]		Load Capacity [kg]				
Overall Diameter	Section Width	All Vehicles Static	Other Vehicles		Counterbalanced Lift Trucks up to 25 km/h	
		0 km/h	10 km/h	16 km/h	Load Wheel	Steering Wheel
125	50	195	130	100		
150	50	270	180	135		
150	75	450	300	230		
160	50	300	200	150		
186	50	465	310	270	275	225
200	75	600	400	300		
200	85	660	440	330		
200	130	1090	725	660		
170	45	240	160	140		
180	75	595	380	290		
175	50	280	185	160		
200	50	420	280	210		
250	75	750	500	400		
250	130	1.610	875	800	775	635
260	75	765	510	385		
280	75	765	505	385		
254	90	1010	545	395		
250	90	820	545	395		
220	60	540	360	270		
230	75	750	500	380		
250	80	810	540	410		
250	105	1185	645	700	570	465
260	85	930	620	465		
260	105	1250	675	615		
260	130	1.315	875	795		
300	85	960	640	480		
315	145	1.825	1.215	1.055		
330	145	1.900	1.265	1.100		
250	50	540	360	270		
250	85	895	595	455		
330	145	1.890	1.260	1.095		
300	90	1000	720	540		
300	100	1315	715	650	635	520
313	130	1.555	1.035	945		
280	75	850	565	425		
285	75	870	580	440		
310	60	780	520	390		
300	75	880	585	445		
300	75	740	560	420		
305	75	740	560	420		
360	60	900	600	450		
360	75	1140	760	570		

COUNTERBALANCED FORKLIFT TRUCKS

Trelleborg POS



Press on solid

Size mm	Tire type & Pattern ● Smooth crowned (PL) ■ Smooth flat (FL) ▼ Traction flat (GL/GS) ◆ Traction crowned (TR)	
	Smooth 	Traction 
360x85x270	■	
450x120x300	■	
405x65x305	■	
405x130x305	■	▼
405x220x305	●	
405x260x305	■	
415x75x305	■	
415x90x305	■	
415x100x305	■	
425x150x305	■	
425x260x305	■	
425x300x305	■	
450x260x305	■	
450x300x305	■	
440x200x330	■	
500x85x370	■	
500x100x370	■	
500x140x370	■	
500x280x370	■	
520x120x370	■	
550x120x410	■	
550x160x410	■	
610x100x410	■	
610x150x410	■	
620x200x410	■	
630x180x410	■	
645x250x410	■	
645x300x410	■	
645x350x410	■	
670x200x410	■	
680x150x470	■	
710x300x470	■	
645x200x480	■	
660x203x480		▼
660x250x480		▼
705x180x485	■	
760x250x500	■	
780x200x555	■	
840x350x559	■	
854x320x600	■	
926x240x670	■	
968x240x670	■	

AVAILABLE COMPOUNDS



Product Dimensions [mm]		Load Capacity [kg]				
Overall Diameter	Section Width	All Vehicles Static	Other Vehicles		Counterbalanced Lift Trucks up to 25 km/h	
		0 km/h	10 km/h	16 km/h	Load Wheel	Steering Wheel
360	85	1.060	840	630		
450	120	1.845	1.230	1.120		
405	65	1080	720	540		
405	130	2.280	1.240	1.135	1.095	900
405	220	3.400	2.265	1.970		
405	260	5.020	2.730	2.495	2.415	1.980
415	75	985	800	590		
415	90	1.265	875	760		
415	100	1.685	915	835	810	665
425	150	2.885	1.570	1.435	1.385	1.135
425	260	5.470	2.970	2.720	2.630	2.155
425	300	6.410	3.450	3.000	3.050	2.500
450	260	5.965	2.965	2.585	2.865	2.350
450	300	7.020	3.490	3.045	3.375	2.765
440	200	3.340	2.225	2.030		
500	85	1.310	1.050	785		
500	100	1.560	1.040	955		
500	140	2.460	1.640	1.495		
500	280	5.590	3.725	3.405		
520	120	2.055	1.370	1.255	1.215	995
550	120	2.645	1.440	1.315	1.270	1.040
550	160	3.855	2.100	1.915	1.855	1.520
610	100	1.560	1.040	950		
610	150	3.775	2.055	1.880	1.815	1.490
620	200	5.710	3.110	2.840	2.745	2.250
630	180	4.065	2.710	2.475		
645	250	7.245	3.930	3.430	3.305	2.745
645	300	9.130	4.960	4.330	4.170	3.460
645	350	11.020	5.985	5.225	5.035	4.180
670	200	4.855	3.235	2.955		
680	150	3.315	2.210	2.020		
710	300	8.010	5.340	4.660		
645	200	5.825	3.175	2.900	2.800	2.295
660	203	5.565	3.025	2.645	2.545	2.110
660	250	7.200	3.910	3.415	3.290	2.735
705	180	5.420	2.950	2.695		
760	250	8.195	4.450	3.885	3.740	3.105
780	200	5.530	3.685	3.365	3.255	2.665
840	350	11.055	7.370	5.850	6.200	5.150
854	320	10.020	6.680	5.835		
926	240	7.330	4.885	4.265		
968	240	7.480	4.985	4.350		



COUNTERBALANCED FORKLIFT TRUCKS

PS800

Press on solid



AVAILABLE COMPOUNDS

MULTI
PURPOSE

NON
MARKING



Size	Metric Size	Tire type & Pattern ● Smooth crowned (PL) ■ Traction flat (MG)		Load Capacity [kg]				
		Smooth	Traction	All Vehicles Static	Other Vehicles		Counterbalanced Lift Trucks up to 25 km/h	
				0 km/h	10 km/h	16 km/h	Load Wheel	Steering Wheel
10x4x6½	254x102x165	●		1.175	640	555	565	465
10x5x6½	254x127x165	●		1.530	830	725	735	605
12x4½x8	305x114x203	●		1.570	860	745	755	620
12x5½x8	305x140x203	●		2.025	1.095	950	970	795
14x4½x8	356x114x203	●		1.770	960	830	850	695
14x5x10	356x127x254	●		2.020	1.095	955	970	795
15x4x11¼	381x102x286	●		1.605	2.245	1.915	775	635
15x5x11¼	381x127x286	●		1.605	1.140	990	1.010	830
16x5x10½	406x127x267	●	■	2.275	1.240	1.080	1.095	895
16x6x10½	406x152x267	●	■	2.875	1.570	1.360	1.390	1.140
16¼x4x11¼	413x102x286		■	1.475	925	805	815	670
16x7x10½	406x178x267	●	■	3.500	1.910	1.660	1.685	1.380
16¼x5x11¼	413x127x286	●	■	2.300	1.250	1.090	1.105	905
16¼x6x11¼	413x152x286	●	■	2.890	1.580	1.370	1.395	1.140
18x5x12½	457x127x308	●		2.480	1.350	1.170	1.195	980
18x6x12½	457x152x308	●	■	3.155	1.720	1.500	1.525	1.250
18x7x12½	457x178x308	●	■	3.855	2.100	1.820	1.855	1.520
18x8x12½	457x203x308	●	■	4.530	2.475	2.150	2.180	1.790
21x7x15	533x178x381	●	■	4.335	2.350	2.050	2.085	1.710
21x8x15	533x203x381	●	■	5.100	2.775	2.425	2.455	2.015
21x9x15	533x229x381	●	■	5.890	3.200	2.775	2.830	2.320
22x8x16	559x203x406	●	■	5.285	2.875	2.500	2.545	2.085
22x9x16	559x229x406	●	■	6.110	3.325	2.875	2.930	2.400
22x12x16	559x305x406	●		8.515	4.625	4.025	4.090	3.350
28x12x22	711x305x559	●		10.190	5.540	4.820	4.900	4.015



TR-900



Pneumatic

TREAD PATTERNS



Size	Rim	Vehicle							Product Dimensions [mm]	Inflation Pressure [bar]	Tire Type	Load Index	Speed Symbol	Load Capacity [kg]					
		Straddle Carrier	RTG	Reach Stacker	Container Handler	Empty Container Handler	Alternative Size	Ply Rating						Overall Diameter	Section Width	Tread Depth	Other Vehicles	Counterbalanced Lift Trucks up to 25 km/h	
																		Straddle Carrier @ 25km/h	Load Wheel
12.00R20	8.5-20					X	330/95-20	-	1.136	320	41	10	TT	176	A5		9.230	7.100	
12.00R24	8.5-24					X	330/95R24	-	1.232	322	39	10	TT	178	A5	-	9.750	7.500	
14.00R24	10.0-24			X	X	X		-	1.416	390	64	10	TT	193	A5		14.950	11.500	
16.00R25	11.25-25/2.0	X					445/95R25	-	1.495	424	56	10	TL	200	A5	14.700	18.200	14.000	

T-900



Pneumatic

TREAD PATTERN



Size	Rim	Vehicle								Product Dimensions [mm]			Inflation Pressure [bar]	Tire Type	Load Index	Speed Symbol	Load Capacity [kg]		
		Straddle Carrier	RTG	Reach Stacker	Container Handler	Empty Container Handler	Alternative Size	Ply Rating		Overall Diameter	Section Width	Tread Depth					Other Vehicles	Counterbalanced Lift Trucks up to 25 km/h	
																		RTG	Load Wheel
12.00-20	8.5-20					X	330/95-20	20		1.145	325	35	10	TT	175	A5	-	8.970	6.900
12.00-20	8.5-20					X	330/95-20	24		1.145	325	35	10	TT	178	A5	-	9.710	7.470
12.00-20	8.5-20					X	330/95-20	28		1.151	323	35	11	TT	180	A5	-	10.400	8.000
12.00-24	8.5-24					X	330/95-24	20		1.245	320	35	10	TT	178	A5	-	9.750	7.500
12.00-24	8.5-24					X	330/95-24	24		1.245	320	35	10	TT	178	A5	-	9.945	7.650
14.00-24	10.00W-24		X	X	X	X	385/95-24	28		1.360	380	39	10	TT	186	A5	12.600	12.600	9.690



SR940

Radial pneumatic



TREAD PATTERN



Traction



Size	Rim	Vehicle								Product Dimensions [mm]			Inflation Pressure [bar]	Tire Type	Load Index	Speed Symbol	Load Capacity [kg]	
		Straddle Carrier	RTG	Reach Stacker	Container Handler	Empty Container Handler	Alternative Size	Ply Rating		Overall Diameter	Section Width	Tread Depth					Static Load	Reach Stacker 25 km/h
480/95R25	13.00/2.5-25 11.25/2.0-2	X								1.565	469	51	10	TL	208	A5	19.800	18.000

CX940

Bias pneumatic



TREAD PATTERN



Traction



Size	Rim	Vehicle								Product Dimensions [mm]			Inflation Pressure [bar]	Tire Type	Load Index	Speed Symbol	Load Capacity [kg]	
		Straddle Carrier	RTG	Reach Stacker	Container Handler	Empty Container Handler	Alternative Size	Ply Rating		Overall Diameter	Section Width	Tread Depth					Static Load	Reach Stacker 25 km/h
18.00-25	13.00/2.5		X	X	X	X		40		1.658	531	64	10	TL	207	A5	26.250	17.500

Inflation pressure disclaimer for all industrial pneumatic tires

- Most tire damages are due to, or aggravated by, incorrect inflation pressures.
 - Under-inflation causes over-heating and can greatly shorten the life of a tire. It reduces stability and can cause irregular wear, internal damage and, ultimately, even tire break-up.
 - Over-inflation causes the tire to be more susceptible to impact damage and in extreme cases may result in rim deformation or even a tire burst.
 - Inflation pressures must be checked regularly at least once a fortnight - These checks should be made only when tires are cold because pressure rises as they warm up in running. Never bleed warm tires.
- Cold inflation pressures must always comply with the vehicle or tire manufacturer's recommendations for the vehicle, type of tire and the intended service. Pressure increase during running, which may reach or even exceed 20%, is normal and is allowed for in the design of the tire. Therefore the inflation pressure of warm tires must never be adjusted back to the recommended (cold) values.
 - Note that the valve cap, which must be of the sealing type, acts as a supplementary air seal and should be fitted at all times.



XP1000

Resilient tires



TREAD PATTERN



Traction



Smooth Flat (FL)



Size	Metric Size	Vehicle		Alternative Size	Ply Rating		Product Dimensions [mm]		Load Index	Speed Index	Load Capacity [kg]		
		Terminal Trailer	Counterbalance Lift Trucks				Overall Diameter	Section Width			All Vehicles Static	Counterbalanced Lift Trucks up to 25 km/h	
											Static	Load Wheel	Steering Wheel
11.00-20	8.0-20	X		330/95-20	-		1.040	260	167	A5	8.230	6.540	5.450
12.00-20	8.0-20	X		330/95-20	-		1.092	276	172	A5	9.515	7.560	6.300
12.00-20	8.5-20	X		330/95-20	-		1.092	276	172	A5	9.515	7.560	6.300
12.00-20	10.0-20	X		330/95-20	-		1.092	335	173	A5	9.815	7.800	6.500
12.00-24	8.5-24	X		330/95-24	-		1.185	315	174	A5	10.120	8.040	6.700
12.00-24	10.0-24	X		330/95-24	-		1.185	315	178	A5	11.325	9.000	7.500
14.00-24	10.0-24		X	385/95-24	-		1.321	335	185	A5	13.970	11.100	9.250
16.00-25	11.25-25		X	445/95-25	-		1.445	410	196	A5	18.875	15.000	12.500





Resilient

AVAILABLE COMPOUNDS



Size	Alternative Size	Rim	Tire type & Pattern ● NO LOC ■ LOC ▼ BOTH		Load Index	Speed Symbol	Product Dimensions [mm]		Load Capacity [kg]
			Smooth 	Ribbed 			Overall Diameter	Section Width	Up to @ 25 km/h
8-2	8x2-4	1.2-4	●		52	A5	195	50	200
3.00-4		2.10-4		●	51	A5	252	80	195
3.00-4		2.50C-4		●	51	A5	252	80	195
4.00-4		2.50C-4		●	77	A5	304	95	412
10-2	10x2-6	1.2-6	●		56	A5	255	50	224
10½x4-6		3.25I-6		●	82	A5	267	102	470
140/55-6		4.50E-6		●	101	A5	312	133	825
2.00-8/2.50		2.50-8	●		88	A2	309	103	225
4.00-8		2.50-8		●	97	A5	407	103	730
4.00-8		3.00D-8		●	97	A5	405	107	730
4.00-8		3.75P-8		●	99	A5	407	107	775
15x4½-8	125/75-8	3.00D-8		▼	100	A5	380	105	800
5.00-8		3.00D-8		▼	111	A5	458	113	1.090
5.00-8		3.75P-8		●	113	A5	456	119	1.150
18x7-8	180/70-8	4.33R-8		▼	125	A5	452	147	1.650
16x5-9/3.50		3.50-9		●	102	A5	410	125	845
6.00-9		4.00E-6		▼	121	A5	530	142	1.450
7.00-12		5.00S-12		▼	136	A5	653	165	2.240
26x8.5-15/7.00		7.00-15		●	144	A5	657	216	2.830
40x14-16/10.00		10.00-16	●		184	A2	1.010	332	9.000
40x14-16/11.00		11.00-16	●		185	A2	1.010	332	9.250



GROUND SUPPORT EQUIPMENT

KARGO PLUS



Bias pneumatic



Size	Alternative Size	Ply rating	Rim	Tire type & Pattern ● Tube Type	Product Dimensions [mm]			Inflation pressure	Load Index	Speed Symbol	Load capacity up to 25 km/h (kg)	Load capacity up to 35 km/h (kg)
				Ribbed 	Overall Diameter	Section Width	Tread depth					
6.00-9		10	4.00E	●	540	162	12	8.50	118	A5	1.320	1.220
6.50-10		10	5.00F/5.50F	●	581	177	13	7.75	122	A5	1.500	1.390
7.00-12		14	5.00S	●	682	191	14	9.00	134	A5	2.120	1.960
8.75-16.5		10	6.75	●	757	224	18	5.25	124	A5	1.600	1.480

GSE POS



Press on solid

AVAILABLE COMPOUNDS



Size	Rim	Tire type & Pattern ● Smooth Flat	Product Dimensions [mm]		Load capacity up to 25 km/h (kg)
		Smooth 	Overall Diameter	Section Width	
365x160-220	160-220	●	365	160	1.545
22x14x16	14.0-16	●	559	356	3.990
28x10x22	10.0-22	●	711	254	4.490
28x12x22	12.0-22	●	711	305	5.540
28x14x22	14.0-22	●	711	356	6.590
28x16x22	16.00-22	●	711	406	5.520
40x16x30	16.0-30	●	1.025	406	10.160
40x20x30	20.0-30	●	1.025	508	13.180




Lock Ring Wheels

Premium industrial wheels 8" - 15"

Diameter	Wheel Size	Tire Size
4"	2.50C-4	3.00-4
	2.50C-4	4.00-4
8"	3.00D-8	15x4½-8
	3.00D-8	4.00-8
	3.00D-8	5.00-8
	4.33R-8	16x6-8
	4.33R-8	18x7-8
9"	4.00E-9	140/55-9
	4.00E-9	6.00-9
	6.00E-9	21x8-9
10"	5.00F-10	180/60-10
	5.00F-10	6.50-10
	5.50F-10	6.50-10
	5.50F-10	7.50-10
	6.50F-10	200/50-10
	6.50F-10	23x9-10
12"	5.00S-12	6.00-12
	5.00S-12	7.00-12
	8.00G-12	23x10-12
	8.00G-12	27x10-12
	10.00G-12	315/45-12
15"	5.5-15	7.00-15
	5.5-15	7.50-15
	5.5-15	8.25-15
	6.0-15	7.00-15
	6.5-15	7.50-15
	6.5-15	8.25-15
	7.0-15	250-15
	7.0-15	28x9-15
	7.5-15	250-15
	8.0-15	300-15
	9.75-15	355/45-15
	9.75-15	355/50-15
	9.75-15	355/65-15
	11.0-15	400/60-15

Wheel configuration




Lock Ring Wheels

Premium industrial wheels 20" - 24"

Diameter	Wheel Size	Tire Size
20"	6.5-20	8.25-20
	6.5-20	9.00-20
	7.0-20	10.00-20
	7.0-20	9.00-20
	7.5-20	10.00-20
	7.5-20	31x10-20
	7.5-20	31x12-20
	7.5-20	36x14-20
	8.0-20	10.00-20
	8.0-20	11.00-20
	8.0-20	12.00-20
	8.5-20	12.00-20
	10.0-20	12.00-20
	10.0-20	355/50-20
	10.0-20	40x14-20
24"	16.0-20	465/55-20
	8.5-24	12.00-24
	10.0-24	12.00-24
	10.0-24	14.00-24

Wheel configuration

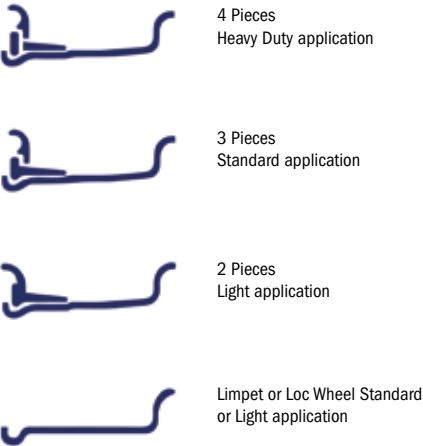

Split Wheels

Premium industrial wheels 8" - 12"

Diameter	Wheel Size	Tire Size
8"	2.50C-8	4.00-8
	2.50C-8	15x4½-8
	3.00D-8	15x4½-8
	3.00D-8	4.00-8
	3.00D-8	5.00-8
	4.33R-8	18x7-8
9"	4.00E-9	140/55-9
	4.00E-9	6.00-9
10"	5.00F-10	180/60-10
	5.00F-10	6.50-10
12"	5.00S-12	6.00-12
	5.00S-12	7.00-12

Wheel configuration



LOCK RING WHEELS 8"-15" LOCK RING WHEELS 20"-24" SPLIT WHEELS 8"-12"

Press On Band Wheels

Premium industrial wheels up to 30"

	Diameter	Wheel Size	Thickness
Min mm	160	50	4
Min inches	6	2	02
Max mm	1000	500	30
Max inches	30	20	1.2

Wheel configuration



Earthmover Wheels

Premium industrial wheels 25" - 33"

Diameter	Wheel Size	Tire Size
25"	11.25-25/2.0	16.00-25
	13.00-25/2.5	-
	14.00-25/1.5	17.5-25
	17.00-25/2.0	20.5-25
	19.50-25/2.5	23.5-25
	22.00-25/3.0	26.5-25
33"	25.00-25/3.5	29.5-25
	13.00-33/2.5	18.00-33

Wheel configuration



Drop Centre Wheels

Premium industrial wheels up to 30"

Diameter	Wheel Size	Tire Size
12"	7.0-12	23x8½-12
15"	7.0-15	27x8½-15
16.5"	8.25-16.5	10-16.5
	9.75-16.5	12-16.5
17.5"	10.50-17.5	14-17.5
19.5"	11.75-19.5	15-19.5

Wheel configuration





Shop our tires online



Discover our website
and your legal guarantee rights

Follow us

